

FORTiS-S™

Functional Safety enclosed encoder system


www.renishaw.com

Specification

Measuring standard	Renishaw stainless-steel scale with single track absolute encoding
Coefficient of thermal expansion (at 20 °C)	10.1 ±0.2 µm/m/°C
Thermal datum	At centre position (encoder position of 0.5 × measuring length)
Measuring lengths available (mm)	140, 240, 340, 440, 540, 640, 740, 840, 940, 1040, 1140, 1240, 1340, 1440, 1540, 1640, 1740, 1840, 2040, 2240, 2440, 2640, 2840, 3040
Accuracy grades	High grade: ≤ ±3 µm Standard grade: ≤ ±5 µm
Resolution	1 nm, 10 nm, 50 nm
Absolute position protocols	BiSS Safety, Siemens DRIVE-CLiQ (with external interface)
Encoder electrical connection	Cable connector M12 custom (customer configurable exit direction)
Controller electrical connection	8-way M12, 9-way D-type, flying lead
Cable length	Multiple options available
Power supply	Depends on protocol
Set-up LED	Signal strength indicator
Maximum speed	4 m/s
Acceleration (readhead relative to scale)	< 200 m/s ² in measuring direction
Moving force (maximum force required to move the readhead through the seals)	< 5 N
Vibration (55 Hz to 2000 Hz)	Housing: < 300 m/s ² to IEC 60068-2-6 Readhead: < 300 m/s ² to IEC 60068-2-6
Shock 11 ms half-sine	< 300 m/s ² IEC 60068-2-27
Operating temperature	0 °C to 50 °C
Storage temperature	-20 °C to 70 °C
Environment protection	IP53 when installed correctly, IP64 with air purge Protection class III Pollution degree II Altitude 2000 m
EMC immunity	IEC 61800-5-2:2016 <i>Electromagnetic immunity requirement for safety related systems - Annex E, second environment</i>
Air purge requirements	Air supply pressure = 1 bar at encoder At correct supply pressure the supplied air connection fitting restricts the air flow rate to 2 l/min
Weight	0.27 kg + 2.0 kg/m

The FORTiS-S FS enclosed encoder system

FORTiS-S FS encoders are for use in Functional Safety applications and are certified to:

- ▶ ISO 13849 Category 3 PLd
- ▶ IEC 61508 SIL2
- ▶ IEC 61800-5-2 SIL2.

The FORTiS-S FS enclosed encoder system is suitable for use in a Category 3 performance level d (PLd) application in compliance with ISO 13849-1 and in a safety integrity level 2 (SIL2) application in compliance with IEC 61508 and IEC 61800-5-2.*

The FORTiS-S FS encoder system provides safe position data that supports the following safety sub-functions defined by IEC 61800-5-2:

- ▶ Safe stop 1 (SS1) and Safe stop 2 (SS2)[†]
- ▶ Safe operating stop (SOS)[†]
- ▶ Safe limited acceleration (SLA) $\leq 200 \text{ m/s}^2$
- ▶ Safe acceleration range (SAR) $\leq 200 \text{ m/s}^2$
- ▶ Safe limited speed (SLS) $\leq 4 \text{ m/s}$
- ▶ Safe speed range (SSR) $\leq 4 \text{ m/s}$
- ▶ Safely limited position (SLP)[†]
- ▶ Safely limited increment (SLI)[†]
- ▶ Safe direction (SDI)
- ▶ Safe speed monitor (SSM) $\leq 4 \text{ m/s}$.

For further details see the *FORTiS-S FS enclosed encoder system Functional Safety installation guide and safety manual* (Renishaw part no. M-6725-9016). Available from: www.renishaw.com/fsencoders

*The system must be installed and operated in accordance with the instructions defined in the relevant installation guide. Failure to follow the correct use instructions and failure to heed the limitations may result in PLd and /or SIL2 not being achieved and will invalidate the Functional Safety certification.

[†]See the safety function restrictions for the safe position figure for each FORTiS-S FS encoder system variant.

Functional Safety data declaration

Product identification: FORTiS-S FS with BiSS Safety and Siemens DRIVE-CLiQ protocols

IEC 61508 safety data

Safety integrity level		2	
Random hardware failures (per hour) – BiSS Safety protocol	λ_s	=	8.60E-07
	λ_D	=	1.25E-06
	λ_{DD}	=	1.13E-06
	λ_{DU}	=	1.25E-07
Random hardware failures (per hour) – Siemens DRIVE-CLiQ protocol	λ_s	=	1.11E-06
	λ_D	=	1.70E-06
	λ_{DD}	=	1.53E-06
	λ_{DU}	=	1.70E-07
PFD _{avg}		Not applicable due to continuous demand mode	
PFH (per hour) – BiSS Safety protocol		λ_{DU}	= 1.25E-07
PFH (per hour) – Siemens DRIVE-CLiQ protocol		λ_{DU}	= 1.70E-07
Architectural constraints	Type	B	
	HFT	0	
	SFF	94%	
Hardware safety integrity compliance		Route 1H	
Systematic safety integrity compliance		Route 1S	
Systematic capability		SC 2	
Demand mode		Continuous	
Proof test interval		Not required for continuous demand mode	

ISO 13849 safety data

MTTF _D – BiSS Safety protocol	91 years
MTTF _D – Siemens DRIVE-CLiQ protocol	67 years
Diagnostic coverage	Medium (90%)
Category	3
Performance level	d
Lifetime/replacement limits	20 years

Safety function


The FORTiS-S FS encoder shall provide a safe position when requested by the controller.

When installed correctly, the FORTiS-S FS encoder has mechanical safe position of ± 1 mm.

In addition to any safety requirements defined by the communication protocol, to achieve full system integrity the evaluation unit must continuously monitor the error condition of the FORTiS-S FS encoder system,* and in the case of fault detection place the system into a safe state within the process safety time.

*Maximum request rate supported is 32 kHz.

Mounting orientations

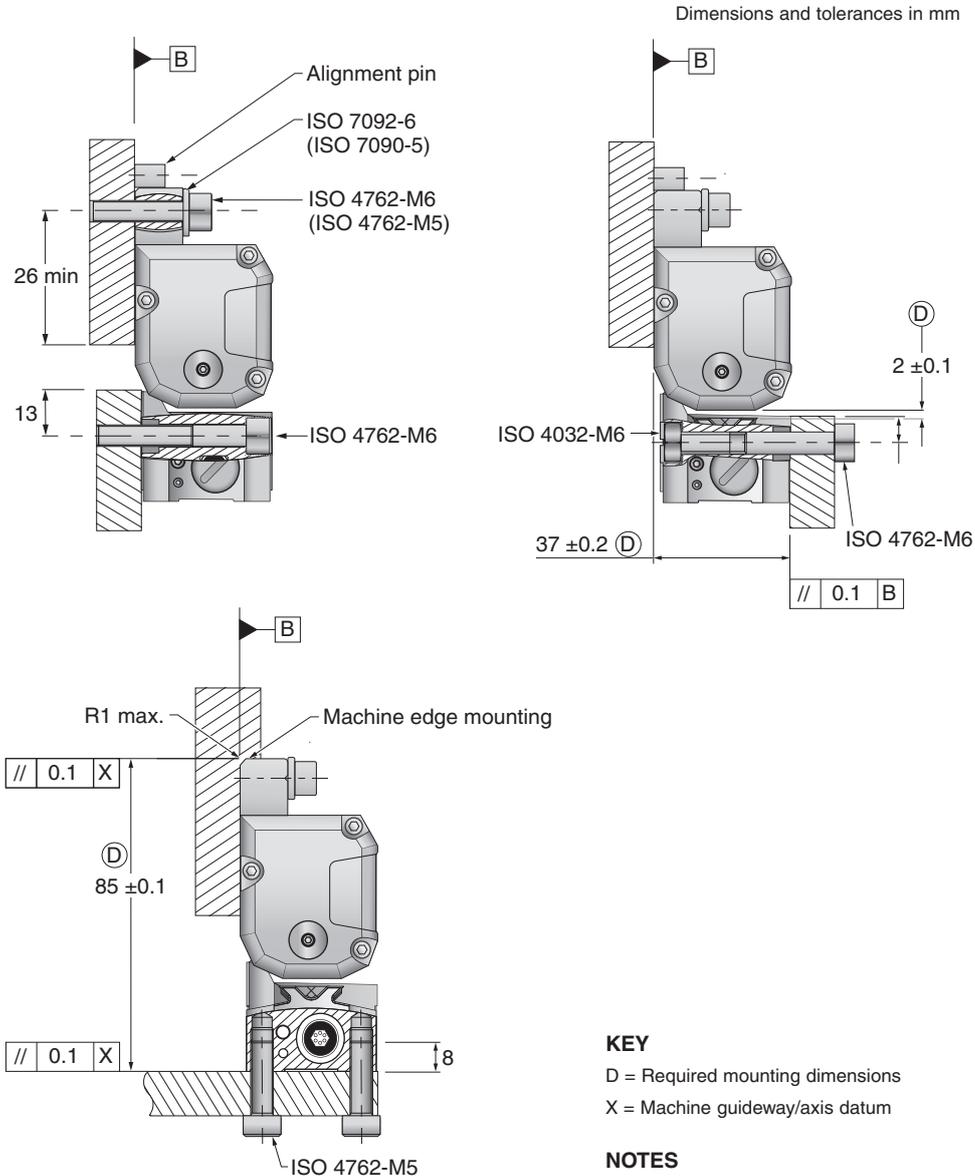

For worldwide contact details, visit www.renishaw.com/contact

WHILE CONSIDERABLE EFFORT WAS MADE TO VERIFY THE ACCURACY OF THIS DOCUMENT AT PUBLICATION, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS AND LIABILITY, HOWSOEVER ARISING, ARE EXCLUDED TO THE EXTENT PERMITTED BY LAW. RENISHAW RESERVES THE RIGHT TO MAKE CHANGES TO THIS DOCUMENT AND TO THE EQUIPMENT, AND/OR SOFTWARE AND THE SPECIFICATION DESCRIBED HEREIN WITHOUT OBLIGATION TO PROVIDE NOTICE OF SUCH CHANGES.

